



WEVER & DUCRÉ
LIGHTING

TAIO ROUND IP65 1.0

180181W5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Signal White

IP65

Interior

335^a to 455^b lm

RAL 9003^c

LED

3000 K

OPTICAL

Flood

PHYSICAL

Diameter 77 mm

Height 55 mm

0.13 kg

wire springs

ELECTRICAL

excl. power supply

18 V

Total connected power 6^a to 9^b W

LED Inset 6^a to 9^b W

PC3

Safety distance 0.3 m

CUTOUT

Diameter 68-70 mm

Min. ceiling thickness 4 mm


Max. ceiling thickness 27 mm

Recessed depth 70 mm


^a 350mA

^b 500mA

^c RAL Palette colors may deviate slightly due to production conditions.

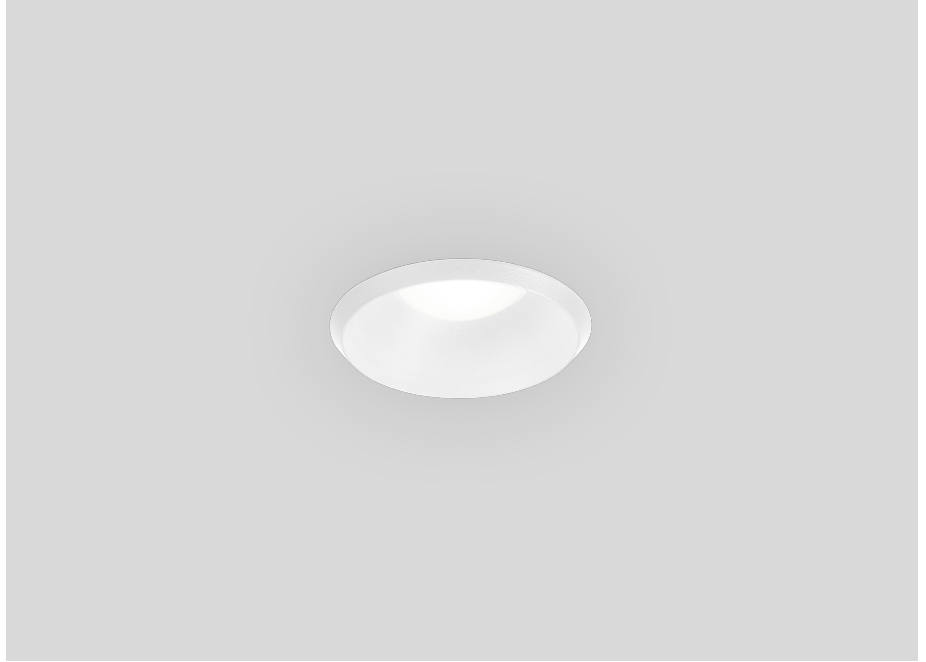

IP65 0,3





WEVER & DUCRÉ
LIGHTING

TAIO ROUND IP65 1.0

180181W5

ELECTRICAL

Power Supply 350mA

| TYPE | L · W · H (MM) | ORDERCODE |
|---------------------------|----------------|-----------------|
| Driver 17W 2-49V IP68 | 122·54·26 | 9 0 2 1 3 6 0 2 |

Power Supply 500mA

| TYPE | L · W · H (MM) | ORDERCODE |
|---------------------------|----------------|-----------------|
| Driver 24W 2-49V IP68 | 122·54·26 | 9 0 2 1 4 7 0 2 |