


Astros



Milan

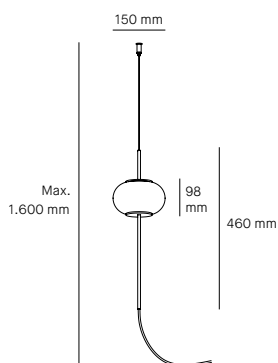

Astros 15 S. & P.

Ø 150 | H. 460 mm
2 x G9 Bulb retrofit



LED 4,8 W Code 2024 | CRI 80
600 (x2) lumens | 2.700 K
Not dimmable




LED 3,5 W Code 2990 | CRI 80
350 (x2) lumens | 2.700 K
Dimmable
Class I: Basic insulation

Finishes

6935 ● Matt black lacquering
(RAL 9005)

Accessories

2400 Aerial dimmer
9416 Spare dimmer



DOWNLOADS

Catalogue

[Astros](#)

3D Files

[6935 + 2401 + 9416](#)

3D Max Files

[6935 + 2401 + 9416](#)

Assembly instructions

[6935 + 2401 + 9416](#)

Photometric curve

[6935 + 2401 + 9416](#)


Economic efficiency index

[6935 + 2401 + 9416](#)

Contemplating
the constellations

Satin triplex opal blown glass diffuser shade. Upper and lower supports of the screen in injected zamak. Matt black lacquer finish (RAL 9005). Interior support for lamp holder G9 (x2) made of injected zamak. Steel tube. Matt black lacquer finishes (RAL 9005).

Fixing the model to the ceiling by means of black stainless steel cabling with height adjustment system included. Cable length: 1,3 meters. 2-meter electrical cable. Possibility of adapting aerial dimmer.

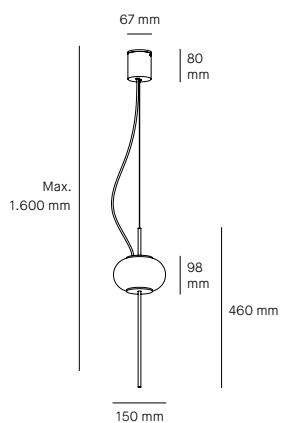

Astros 15 S. & P.

Ø 150 | H. 460 mm
2 x G9 Bulb retrofit



LED 4,8 W Code 2024 | CRI 80
600 (x2) lumens | 2.700 K
Not dimmable



LED 3,5 W Code 2990 | CRI 80
350 (x2) lumens | 2.700 K
Dimmable
Class I: Basic insulation

Finishes

6936 ● Matt black lacquering
(RAL 9005)

Satin triplex opal blown glass diffuser shade. Upper and lower supports of the screen in injected zamak. Matt black lacquer finish (RAL 9005).

Interior support for lamp holder G9 (x2) made of injected zamak. Steel tubes and fixing base in matt black lacquer finishes (RAL 9005).

Model suspended by black stainless steel cable. Electric black cable through lateral exit.

DOWNLOADS

Catalogue

[Astros](#)

3D Files

[6936](#)

3D Max Files

[6936](#)

Assembly instructions


[6936](#)

Photometric curve

[6936](#)

Economic efficiency index

[6936](#)

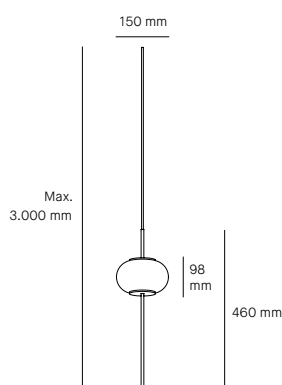

Astros 15 S.

Ø 150 | H. 460 mm
2 x G9 Bulb retrofit



LED 4,8 W Code 2024 | CRI 80
600 (x2) lumens | 2.700 K
Not dimmable




LED 3,5 W Code 2990 | CRI 80
350 (x2) lumens | 2.700 K
Dimmable
Class I: Basic insulation

Finishes


6937 ● Matt black lacquering
(RAL 9005)

Accessories

2383



4937



Finishes

2383 ● Matt black lacquering
(RAL 9005)

4937 ● Matt black lacquering
(RAL 9005)

Satin triplex opal blown glass diffuser shade. Upper and lower supports of the screen in injected zamak. Matt black lacquer finish (RAL 9005). Interior support for lamp holder G9 (x2) made of

injected zamak. Model suspended by black electrical cable. Length: 3 meters. Base injected in zamak (code 2383), finished in matt black lacquer (RAL 9005) for one suspension.

Stamped steel base (code 4937), finished in matt black lacquer (RAL 9005) for 2,3,4,5 up to 6 suspensions.

DOWNLOADS

Catalogue

[Astros](#)

3D Files

[6937 + 2383 + 4937](#)

3D Max Files

[6937 + 2383 + 4937](#)

Assembly instructions

[6937 + 2383 + 4937](#)

Photometric curve

[6937 + 2383 + 4937](#)

Economic efficiency index

[6937 + 2383 + 4937](#)