

## Knock



## Milan

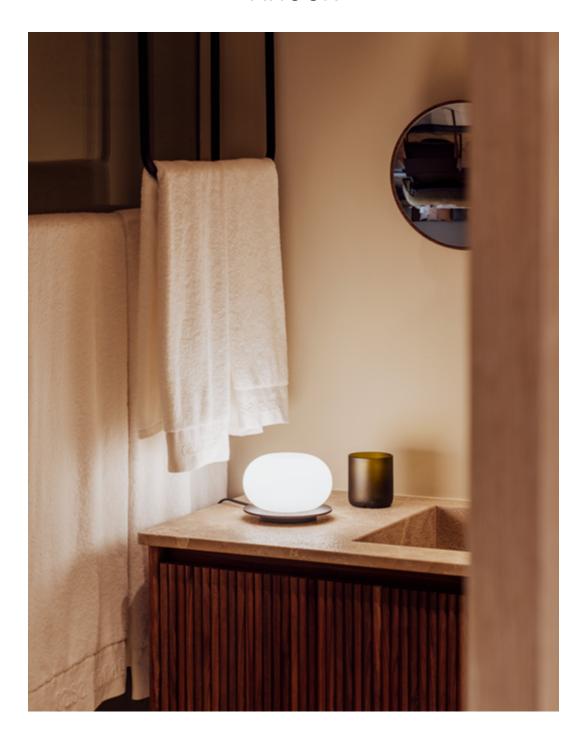



## Knock 15 T.

Ø 150 | H. 108 mm 1 x G9 Bulb retrofit

LED 4,8 W Code 2024 | CRI 80 600 lumens | 2.700 K Not dimmable

LED 3,5 W Code 2990 | CRI 80 350 lumens | 2.700 K Dimmable Class I: Basic insulate plus reinforced insulation

## Finishes

6715 • • Ash wood / Matt black laquering **DOWNLOADS** 

Catalogue

Knock

3D Files

6715

3D Max Files

6715

Assembly instructions

6715

Photometric curve

6715

Economic eficiency index

6715

A blend of dynamism and coherence

Satin triplex opal blown glass diffuser shade. 3.5 mm thick ash decorative shade, varnished on the wooden side and black lacquered on the other side of the shade. G9 interior lamp holder in injected polycarbonate. Matt black

finish. Screen fixing system, both decorative and glass diffuser, using a system of three internal springs fixed on the support. Aerial switch included in black electrical cord. Length: 2 meters.